

## EM 2700



Powermate portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works.

A complete range to choose from, for best solution to your remote power needs.

When not fixing up around the job site, your Powermate portable generator can be used for emergency power during a power outage.

### FEATURES

- Powermate OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Practical quick user's Starting Instruction (decal)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	2200
Rated Power	Watts	2000



## Engine

Brand	Powermate	
Type	OHV	
Operating Speed Nominal	rpm	3000
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	0.6
Low Oil Shutdown	√	




## Alternator

Voltage regulation system	AVR
---------------------------	-----

## Dimensional data

Length	(L) mm	644
Width	(W) mm	545
Height	(H) mm	514
Dry weight	kg	43
Carton box dimension LxWxH	mm	620x452x475

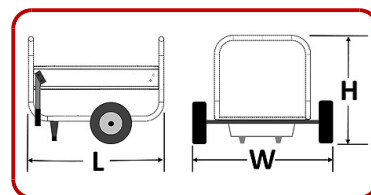

## Autonomy

Fuel tank capacity		15
Fuel consumption 50%	l/h	1.4
Running time 50%	h	10.5



## Noise level

Guaranteed noise level (LWA)	dB(A)	95
Noise pressure level @ 7 m	dB(A)	67

## GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS:

- Start selector switch OFF - ON
- Recoil start

### INSTRUMENTATION

- Voltmeter
- Fuel Level

### PROTECTIONS:

- Thermal Circuit Breaker
- Oil Guard



The information is aligned with the Data file at the time of download. Printed on 23/11/2021 (ID 12762)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

## EM 2800



Powermate portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works.

A complete range to choose from, for best solution to your remote power needs.

When not fixing up around the job site, your Powermate portable generator can be used for emergency power during a power outage.

### FEATURES

- Powermate OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Practical quick user's Starting Instruction (decals)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	2800
Rated Power	Watts	2500



**Engine**


Brand	Powermate	
Type	OHV	
Operating Speed Nominal	rpm	3000
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	0.6
Low Oil Shutdown	√	

**Alternator**

Voltage regulation system	AVR
---------------------------	-----

**Dimensional data**

Length	(L) mm	645
Width	(W) mm	540
Height	(H) mm	540
Dry weight	kg	40
Carton box dimension LxWxH	mm	615x450x465

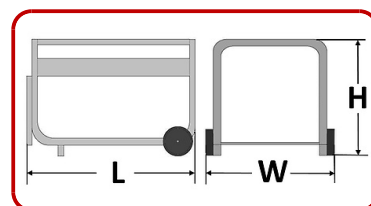**Autonomy**

Fuel tank capacity		3.6
Fuel consumption 75%	l/h	1.2
Running time 75%	h	2.9

**Noise level**


Guaranteed noise level (LWA)	dB(A)	96
Noise pressure level @ 7 m	dB(A)	68

**GENSET CONTROL****COMMANDS:**

- Selector switch: OFF - ON
- Starting systems: Recoil
- Fuel Cock

**PROTECTIONS STANDARD:**

- Thermal protection
- Oil Guard

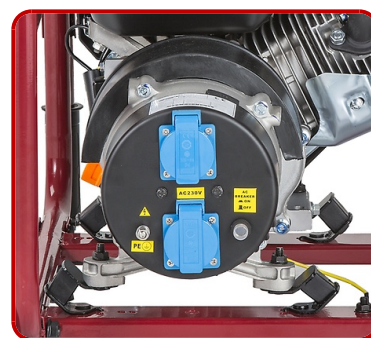**SOCKET TYPE**

SCHUKO 230V 16A IP44	2
----------------------	---

The information is aligned with the Data file at the time of download. Printed on 23/11/2021 (ID 6429)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package.  
Specifications subject to change without notice



## EM 3300



Portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works.

A complete range to choose from, for best solution to your remote power needs.

When not fixing up around the job site, your portable generator can be used for emergency power during a power outage.

### FEATURES

- Powermate OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Fuel gauge allows user to track gasoline levels
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	3000
Rated Power	Watts	2600



**Engine**


Brand	Powermate	
Type	OHV	
Operating Speed Nominal	rpm	3000
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	0.6
Low Oil Shutdown	√	

**Alternator**

Voltage regulation system	AVR
---------------------------	-----

**Dimensional data**

Length	(L) mm	644
Width	(W) mm	545
Height	(H) mm	514
Dry weight	kg	48
Carton box dimension LxWxH	mm	620x452x475

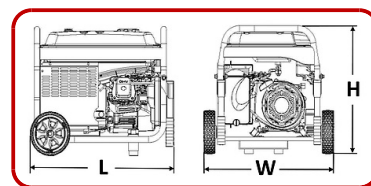**Autonomy**

Fuel tank capacity	15	
Fuel consumption 50%	l/h	1.7
Running time 50%	h	9

**GENSET CONTROL PANELS**

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

**COMMANDS:**

- Start selector switch OFF - ON
- Recoil start

**INSTRUMENTATION**

- Voltmeter
- Fuel Level

**PROTECTIONS:**

- Thermal Circuit Breaker
- Oil Guard

**SOCKET TYPE**

SCHUKO 230V 16A IP44	2
----------------------	---

The information is aligned with the Data file at the time of download. Printed on 23/11/2021 (ID 12760)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package.  
Specifications subject to change without notice

## EM 4100



Portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works.

A complete range to choose from, for best solution to your remote power needs.

When not fixing up around the job site, your portable generator can be used for emergency power during a power outage.

### FEATURES

- Powermate OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Fuel gauge allows user to track gasoline levels
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	3500
Rated Power	Watts	3200



## Engine

Brand	Powermate	
Type	OHV	
Operating Speed Nominal	rpm	3000
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	0.6
Low Oil Shutdown	√	




## Alternator

Voltage regulation system	AVR
---------------------------	-----

## Dimensional data

Length	(L) mm	644
Width	(W) mm	545
Height	(H) mm	534
Dry weight	kg	53
Carton box dimension LxWxH	mm	620x452x495

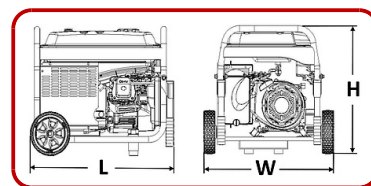

## Autonomy

Fuel tank capacity	15	
Fuel consumption 50%	l/h	1.8
Running time 50%	h	8



## GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS:

- Start selector switch OFF - ON
- Recoil start

### INSTRUMENTATION

- Voltmeter
- Fuel Level

### PROTECTIONS:

- Thermal Circuit Breaker
- Oil Guard



## SOCKET TYPE

SCHUKO 230V 16A IP44	2
----------------------	---

The information is aligned with the Data file at the time of download. Printed on 23/11/2021 (ID 12770)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice



## PMD 5000S



Diesel and soundproof motorization stand for reliability with low operating cost in the maximum comfort. Handle and wheels allow easy move and transportation. Generous fuel tank capacity allows for long continuous running time. Built-in digital multimeter for scheduled maintenance intervals and ensure optimal operating condition. Automatic Voltage Regulator (AVR) allows for tension stability. Connector for Pramac Automatic Transfer Switch (ATS) to electrical grid - optional. Power coated finish helps to prevent corrosion in all weather conditions.

### FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Diesel
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track diesel levels
- AVR Automatic Voltage Regulator
- Equipped with 4 wheels for move and transport easily
- Central lifting point
- Optional Automatic Transfer Switch For an optimal home safety



### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	5000
Rated Power	Watts	4500




Engine		
Brand		Pramac
Type		OHV
Operating Speed Nominal	rpm	3000
Fuel		Diesel
Starting Systems		Electric
Oil capacity	l	1.65
Low Oil Shutdown		√



Alternator		
Voltage regulation system		AVR

Dimensional data		
Length	(L) mm	910
Width	(W) mm	518
Height	(H) mm	682
Dry weight	kg	165
Carton box dimension LxWxH	mm	950x570x765

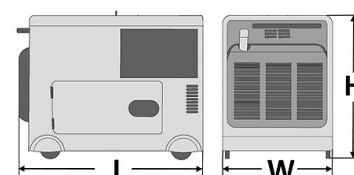

Autonomy		
Fuel tank capacity		14.5
Fuel consumption 50%	l/h	1.28
Running time 50%	h	11.3



Noise level		
Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69

## CONTROL PANEL

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS:

- Start selector switch with key: OFF - ON - START

### INSTRUMENTATION

- Voltmeter
- Hours-counter
- Frequency meter
- Fuel gauge

### PROTECTIONS:

- Thermal Magnetic breaker
- Oil Guard (with lamp)
- Fuse 9A (12V DC)

### OUTPUT:

- Battery Charger 12V DC
- PE screw
- Connector for ATS (Accessory available)



### SOCKET TYPE

SCHUKO 230V 16A IP44	1
2P+T CEE 230V 32A IP44	1

## ACCESSORIES CONTROL PANEL

### ATS - Automatic Transfer Switch for an optimal home safety

With the Powermate Automatic Transfer Switch, you can easily connect your generator to the power grid and continue to supply your domestic appliances in case of a power outage.

#### Equipment:

- Control unit
- Contactor with interblock
- Battery charged
- 8 meters control wiring (with connector)


#### Status indicators:

- House net (lamp)
- Generator (lamp)
- Auto (lamp)
- Failure (lamp)

It is strongly recommended that your Home Standby equipment be installed by a professional.

#### DIMENSIONS PANEL

Width	(W) mm	410
Height	(H) mm	310
Depth	(D) mm	180
Weight	kg	7



## PMD 5050S



Diesel and soundproof motorization stand for reliability with low operating cost in the maximum comfort. Handle and wheels allow easy move and transportation. Generous fuel tank capacity allows for long continuous running time. Built-in digital multimeter for scheduled maintenance intervals and ensure optimal operating condition. Automatic Voltage Regulator (AVR) allows for tension stability.

### FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Diesel
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track diesel levels
- AVR Automatic Voltage Regulator
- Equipped with 4 wheels for move and transport easily
- Central lifting point



### PERFORMANCE

Frequency	Hz	50
Voltage	V	400
Phase		3
Max Power	Watts	4000
Rated Power	Watts	3600

### Single Phase Power

Voltage	V	230
Single Phase Max Power	Watts	1330
Single Phase Rated Power	Watts	1200






Engine		
Brand		Pramac
Type		OHV
Operating Speed Nominal	rpm	3000
Fuel		Diesel
Starting Systems		Electric
Oil capacity	l	1.65
Low Oil Shutdown		√



Alternator	
Voltage regulation system	AVR

Dimensional data		
Length	(L) mm	910
Width	(W) mm	518
Height	(H) mm	682
Dry weight	kg	185
Carton box dimension LxWxH	mm	950x570x765

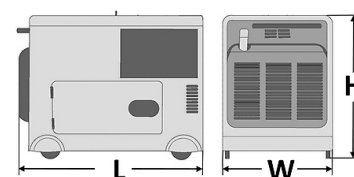

Autonomy		
Fuel tank capacity		14.5
Fuel consumption 50%	l/h	1.28
Running time 50%	h	11.3



Noise level		
Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69

## CONTROL PANEL

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS:

- Start selector switch with key: OFF - ON - START

### INSTRUMENTATION

- Voltmeter
- Hours-counter
- Frequency meter
- Fuel gauge

### PROTECTIONS:

- Thermal Magnetic breaker
- Oil Guard (with lamp)
- Fuse 9A (12V DC)

### OUTPUT:

- Battery Charger 12V DC

### SOCKET TYPE

SCHUKO 230V 16A IP44	1
3P+N+T CEE 400V 16A IP44	1

The information is aligned with the Data file at the time of download. Printed on 23/11/2021 (ID 10764)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice



## PMI 1000



Pramac PMi series inverter: optimal solution to combine silent operation with less fuel consumption and tension stability; the inverters Pramac stabilize the output tension and supply power for all kinds of equipment. They guarantee maximum efficiency: adjusting the speed according to the required load, our inverters reduce the average fuel consumption.

### FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise.




### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	1000
Rated Power	Watts	850



Engine		
Brand	Pramac	
Type	OHV	
Exhaust emission level	Stage V	
Operating Speed Nominal	rpm	Variable
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	0.25
Low Oil Shutdown	√	

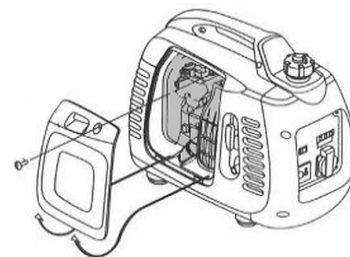

Alternator		
Voltage regulation system	Inverter	

Dimensional data		
Length	(L) mm	480
Width	(W) mm	250
Height	(H) mm	395
Dry weight	kg	14
Carton box dimension LxWxH	mm	510x310x460



Autonomy		
Fuel tank capacity		2.1
Fuel consumption 50%	l/h	0.66
Running time 50%	h	3.2



Noise level		
Guaranteed noise level (LWA)	dB(A)	89
Noise pressure level @ 7 m	dB(A)	61

## GENSET CONTROL

### COMMANDS

- Selector switch: O/I
- Air choke Valve
- Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

### STATUS INDICATORS:

- Outputting energy (indicator light - Green)
- Overloading (indicators light - Red)
- Oil alarming (indicators light - Red)

### PROTECTIONS

- Overload
- Oil Guard

### OUTPUT:

- DC12V 6A
- n°2 USB 5V 2A

### SOCKET TYPE

SCHUKO 230V 16A IP44	1
----------------------	---



## WX 2200



Powermate portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works. A complete range to choose from, for best solution to your remote power needs. When not fixing up around the job site, your Powermate portable generator can be used for emergency power during a power outage.

### FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Engine oil for the first startup supplied in a bottle
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track gasoline levels
- Practical quick user's Starting Instruction (decals)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	2200
Rated Power	Watts	1800





## Engine

Brand	Powermate	
Type	OHV	
Operating Speed Nominal	rpm	3000
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	0.6
Low Oil Shutdown	√	




## Alternator

Voltage regulation system	AVR
---------------------------	-----

## Dimensional data

Length	(L) mm	680
Width	(W) mm	602
Height	(H) mm	523
Dry weight	kg	47
Carton box dimension LxWxH	mm	677x500x510

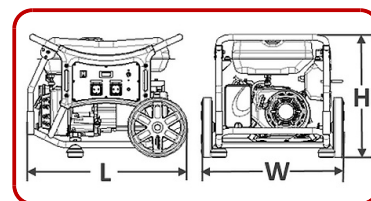

## Autonomy

Fuel tank capacity		17
Fuel consumption 75%	l/h	0.89
Running time 75%	h	19.1



## Noise level

Guaranteed noise level (LWA)	dB(A)	93
Noise pressure level @ 7 m	dB(A)	65

## GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS

- Selector switch: OFF - ON
- Recoil Start

### INSTRUMENTATION

- Voltmeter
- Frequency meter
- Hourmeter
- Fuel gauge

### PROTECTIONS

- Thermal protection
- Oil Guard

### SOCKET TYPE

SCHUKO 230V 16A IP44	2
----------------------	---



The information is aligned with the Data file at the time of download. Printed on 23/11/2021 (ID 6425)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

## WX 6200



Pramac portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works. A complete range to choose from, for best solution to your remote power needs. When not fixing up around the job site, your Pramac portable generator can be used for emergency power during a power outage.

### FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Engine oil for the first startup supplied in a bottle
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track gasoline levels
- Practical quick user's Starting Instruction (decals)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	5800
Rated Power	Watts	5300



## Engine

Brand	Pramac	
Type	OHV	
Exhaust emission level	Stage V	
Operating Speed Nominal	rpm	3000
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	1.1
Low Oil Shutdown	√	

## Alternator

Voltage regulation system	AVR
---------------------------	-----

## Dimensional data

Length	(L) mm	800
Width	(W) mm	698
Height	(H) mm	620
Dry weight	kg	78
Carton box dimension LxWxH	mm	810x625x607

## Autonomy

Fuel tank capacity		26
Fuel consumption 50%	l/h	2.17
Running time 50%	h	12

## Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69

## GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS

- Selector switch: OFF - ON
- Recoil Start

### INSTRUMENTATION


- Voltmeter
- Frequency meter
- Hourmeter
- Fuel gauge

### PROTECTIONS

- Thermal protection
- Oil Guard

### SOCKET TYPE

SCHUKO 230V 16A IP44	2
2P+T CEE 230V 32A IP44	1

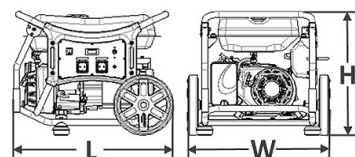

The information is aligned with the Data file at the time of download. Printed on 23/11/2021 (ID 10767)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice



## WX 6200



Pramac portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works. A complete range to choose from, for best solution to your remote power needs. When not fixing up around the job site, your Pramac portable generator can be used for emergency power during a power outage.

### FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Engine oil for the first startup supplied in a bottle
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track gasoline levels
- Practical quick user's Starting Instruction (decals)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	5800
Rated Power	Watts	5300





## Engine

Brand	Pramac	
Type	OHV	
Exhaust emission level	Stage V	
Operating Speed Nominal	rpm	3000
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	1.1
Low Oil Shutdown	√	

## Alternator

Voltage regulation system	AVR
---------------------------	-----

## Dimensional data

Length	(L) mm	800
Width	(W) mm	698
Height	(H) mm	620
Dry weight	kg	78
Carton box dimension LxWxH	mm	810x625x607

## Autonomy

Fuel tank capacity		26
Fuel consumption 50%	l/h	2.17
Running time 50%	h	12

## Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69

## GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS

- Selector switch: OFF - ON
- Recoil Start

### INSTRUMENTATION


- Voltmeter
- Frequency meter
- Hourmeter
- Fuel gauge

### PROTECTIONS

- Thermal protection
- Oil Guard

### SOCKET TYPE

SCHUKO 230V 16A IP44	2
2P+T CEE 230V 32A IP44	1

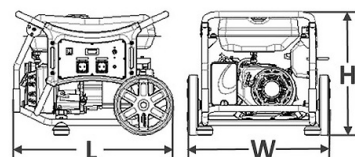

The information is aligned with the Data file at the time of download. Printed on 23/11/2021 (ID 10767)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice



## WX 6250 ES



Pramac portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works. A complete range to choose from, for best solution to your remote power needs. When not fixing up around the job site, your Pramac portable generator can be used for emergency power during a power outage.

### FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Engine oil for the first startup supplied in a bottle
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track gasoline levels
- Practical quick user's Starting Instruction (decal)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



### PERFORMANCE

Frequency	Hz	50
Voltage	V	400/230
Phase		3
Max Power	Watts	6100
Rated Power	Watts	5500



### Single Phase Power

Voltage	V	230
Single Phase Max Power	Watts	2000
Single Phase Rated Power	Watts	1800

## Engine

Brand	Pramac	
Type	OHV	
Exhaust emission level	Stage V	
Operating Speed Nominal	rpm	3000
Fuel	Petrol	
Starting Systems	Electric (+Recoil)	
Oil capacity	l	1.1
Low Oil Shutdown	√	

## Alternator

Voltage regulation system	AVR
---------------------------	-----

## Dimensional data

Length	(L) mm	800
Width	(W) mm	698
Height	(H) mm	620
Dry weight	kg	90
Carton box dimension LxWxH	mm	810x625x607

## Autonomy

Fuel tank capacity		26
Fuel consumption 50%	l/h	2.17
Running time 50%	h	12

## Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69

## GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS

- Selector switch: OFF - ON - START

### INSTRUMENTATION


- Voltmeter
- Frequency meter
- Hourmeter
- Fuel gauge

### PROTECTIONS

- Thermal protection
- Oil Guard

### SOCKET TYPE

SCHUKO 230V 16A IP44	2
3P+N+T CEE 400V 16A IP44	1

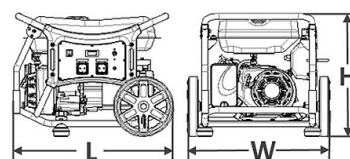

The information is aligned with the Data file at the time of download. Printed on 23/11/2021 (ID 10494)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

